


Model 1100-007


Product Features

- SPDT RF Relay
- 370 MHz
- 12 V Coil (9-26 VDC)
- 50G Shock Resistance
- Excellent RF Performance

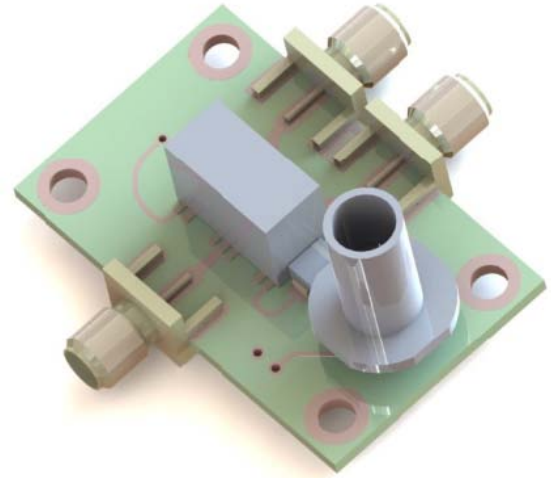

Specifications

Parameter	Value	Units	Description
Insertion Loss	<0.2	dB	<500 MHz
VSWR	<1.5:1		<500 MHz
Port to Port Isolation	>150	dB	<500 MHz
RF Connection	SMA(f)		RF Ports
Control Connection	Glenair Series 801		801-001-07NF5-35A
RF Power Endurance	107	Watts	Maximum Operations
Coil Voltage	9-26	VDC	
Shock Resistance	50	G	Normal Operation

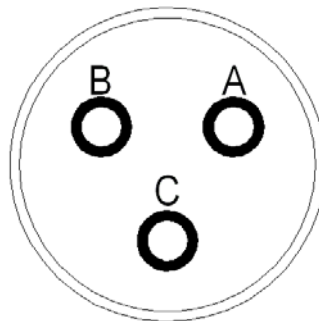

Connector (Top View)

- A +12V DC (9-26 V Range)
- B Relay (Active Low)
- C Optional Ground (Board Jumper)

