

Overview

Southwest Antennas Part # 1001-175 features 4.4 - 6.0 GHz frequency coverage with 2.3 dBi of gain, a rugged black G10 fiberglass radome, and a black chrome RP-TNC(m) Non-Rotating RF connector. The overall product height measures 6.0 inches.

Southwest Antennas' Ultra-Flex Omni Antenna is a rugged, small form factor dipole antenna that features an innovative environmentally-sealed spring base, giving the antenna flexibility to deflect/bend with impacts and return to its original vertical position. The integrated spring design minimizes stress placed on the antenna and radio connection and can help prevent damage to both in the event of an impact.

The spring is fully sealed to prevent rain, dust, and other debris from impacting antenna performance, which is also fully submersible once securely mated to a radio. A G10 fiberglass radome holds up to abuse in the field, and a low-glare black finish helps the antenna blend into surroundings and not draw attention.

Features:


- Broad Band Coverage
- 4.4 - 6.0 GHz
- 50W Power Handling
- 2.3 dBi Omni Radiation Pattern
- Rugged Construction
- Low Glare Black Fiberglass Radome
- Black Chrome RP-TNC(m) RF Connector
- Ultra-Flexible Spring Base
- Sealed Spring / Waterproof Design



Antenna Specifications


Parameter	Value	Units	Tolerance
Antenna Pattern	Omni Antenna		
Frequency Band	C		
Impedance	50	Ohms	
Minimum Frequency	4.4 / 4,400	GHz / MHz	
Maximum Frequency	6.0 / 6,000	GHz / MHz	
Frequency Bandwidth	1.6 / 1,600	GHz / MHz	
Maximum VSWR	<2:1	Ratio	
Maximum Gain	2.3	dBi	
Polarization	Vertical		
Horizontal (AZ) Beamwidth	360	Degrees	
Vertical (EL) Beamwidth	68	Degrees	
Ground Plane Required	No		
Antenna Labeling	Frequency Label on Radome		
Radome Material	G10 Fiberglass		
Color	Black		
Spring or Gooseneck	Spring		
Spring Length	1.00 / 25.40	inches / mm	
Spring Diameter	0.50 / 12.70	inches / mm	
Spring Bend	±90	Degrees	Maximum
Maximum Wind Velocity	100 / 161	mph / kph	
RF Connector Type	RP-TNC(m) Non-Rotating		

Parameter	Value	Units	Tolerance
RF Connector Features	Black Chrome		
Operating Temperature Range	-40 to +85	C	
Product Height	6.00 / 152.40	inches / mm	±.13"
Product Diameter	0.56 / 14.27	inches / mm	+.020" / -.000"
Product Weight	2.0 / 56.7	oz / grams	

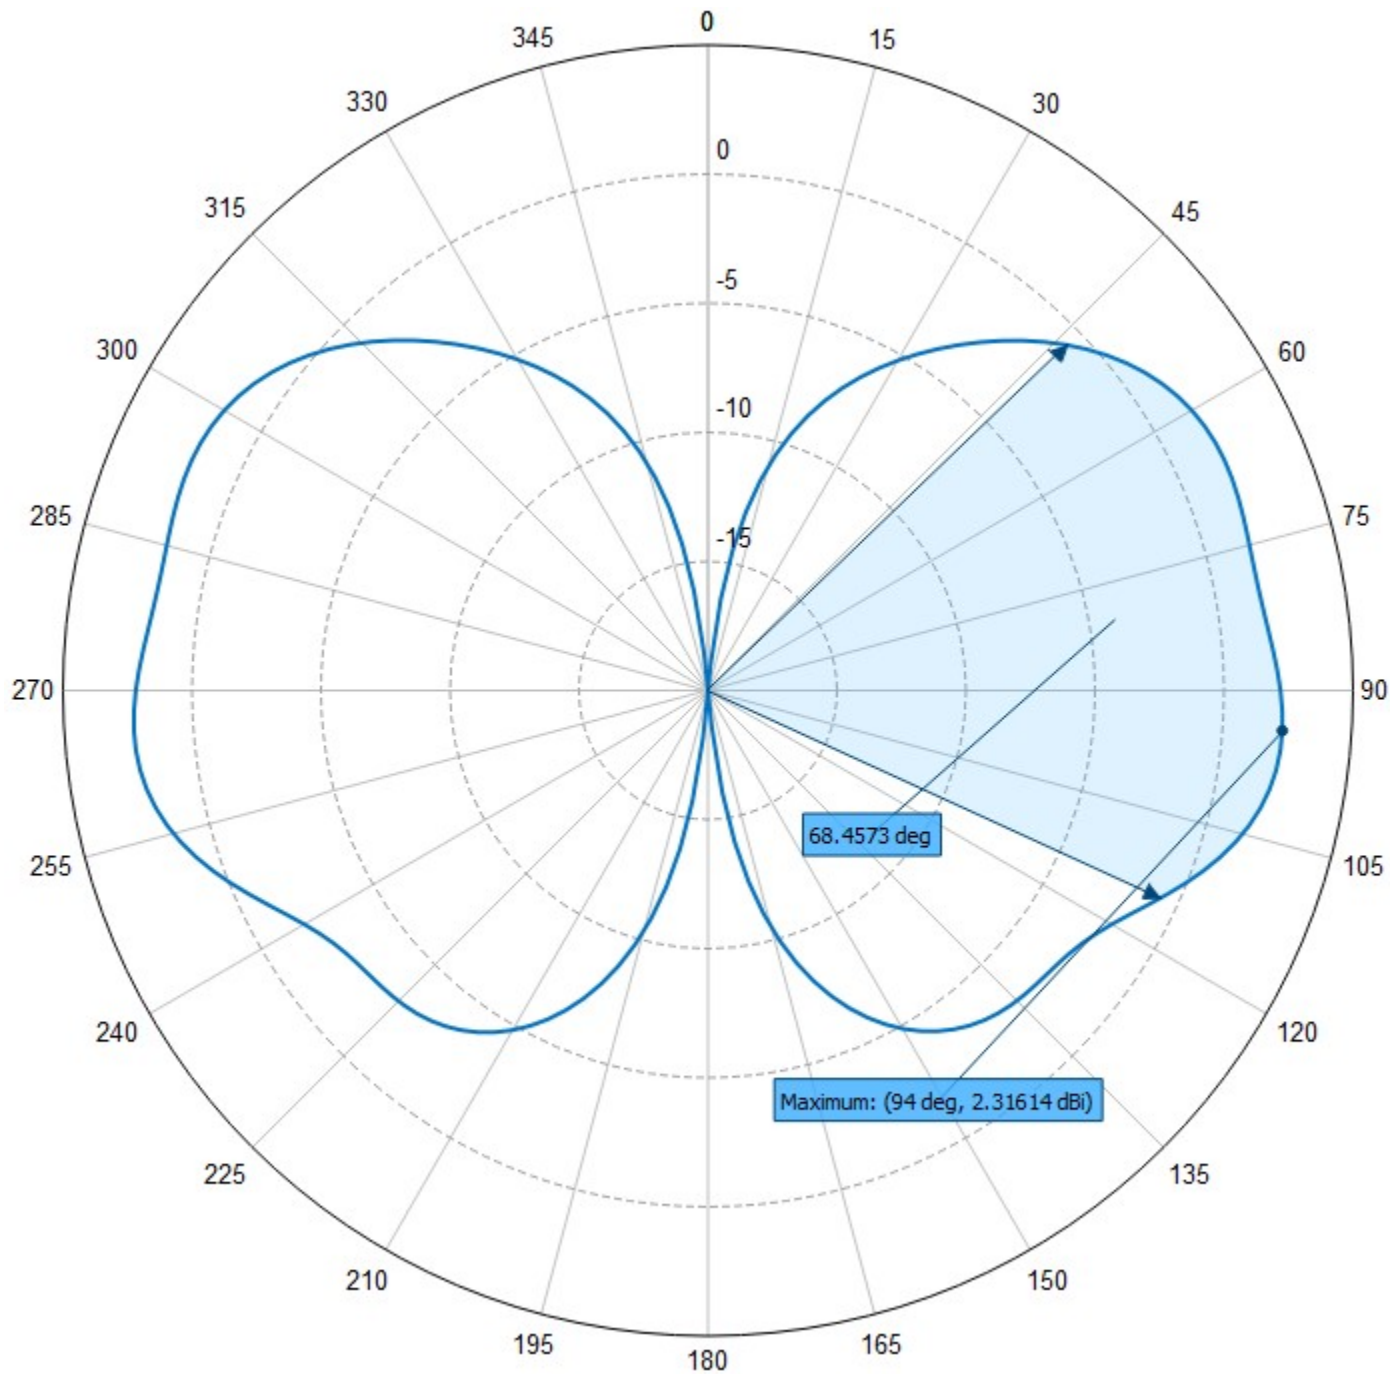

Elevation Pattern

Referenced to +5 dBi

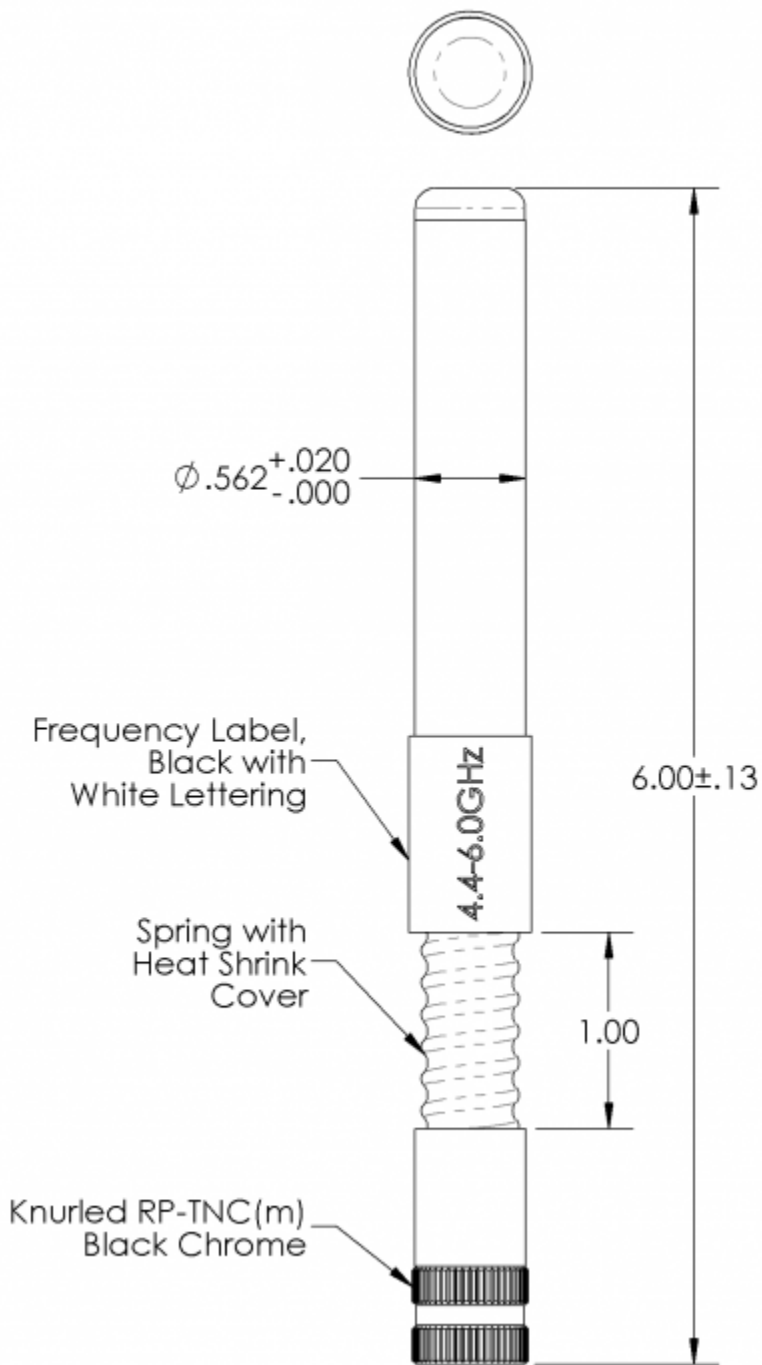

Engineering Drawing

All dimensions are in inches