

## Overview

Southwest Antennas Part # 1080-130 is a small, weatherproof bandpass filter designed to be installed in-line when additional RF filtering is required to improve system performance. This product is ideal for tactical radio systems, fixed site infrastructure, unmanned systems, or other communication networks that are operating in congested, high-interference RF environments. The ceramic bandpass filter is housed inside a rugged G10 fiberglass housing, with RF connectors on both ends of the product.

Part # 1080-130 features a band pass frequency range of 2.22 - 2.30 GHz and a very low <1.2 dBa insertion loss.

Southwest Antennas bandpass filters can be utilized to help eliminate interference by rejecting out-of-band noise from other co-located radios operating outside of the filter's 2.22 - 2.30 GHz operational bandpass range, providing increased performance for radio systems and attached antennas.

## Features:

- Stand-alone filter module with RF connectors
- <1.2 dBa Insertion loss
- 14 dB return loss
- 10W peak power handling
- Small size and lightweight design
- Can be quickly added to existing systems to help improve performance
- 2.22 - 2.30 GHz operational frequency range
- RP-SMA(m) non-rotating and RP-SMA(f) RF connectors




## Applications:


- Tactical radio systems
- Vehicle mounted radios
- Federal government radio systems
- Fixed site communication infrastructure
- Unmanned aerial vehicles
- Unmanned ground vehicles

### Filter Specifications

Parameter	Value	Units	Tolerance
<b>Filter Type</b>	3mm 3-Pole Bandpass Filter (ceramic)		
<b>Fo</b>	2.26 / 2,260	GHz / MHz	
<b>Filter Frequency Band</b>	S Band		
<b>Filter Impedance</b>	50	Ohms	
<b>Filter Min Frequency</b>	2.22 / 2,220	GHz / MHz	
<b>Filter Max Frequency</b>	2.3 / 2,300	GHz / MHz	
<b>Insertion Loss</b>	<1.2	dBa	Maximum @ Center Frequency (Fo)
<b>Return Loss</b>	14	dB	Over 100% of BW
<b>Rejection 1</b>	-15	dBc	Min @ 2,120 - 2,170 MHz
<b>Filter Power CW</b>	8	Watts	
<b>Filter Power Peak</b>	10	Watts	
<b>Operating Temp</b>	-40 to +85	C	
<b>Product Length</b>	2.74 / 69.60	inches / mm	±.06" (including RF connector length)
<b>Product Diameter</b>	0.56 / 14.27	inches / mm	
<b>Product Weight</b>	0.8 / 23.1	oz / grams	
<b>RF Connectors</b>	RP-SMA(m) Non-Rotating to RP-SMA(f)		

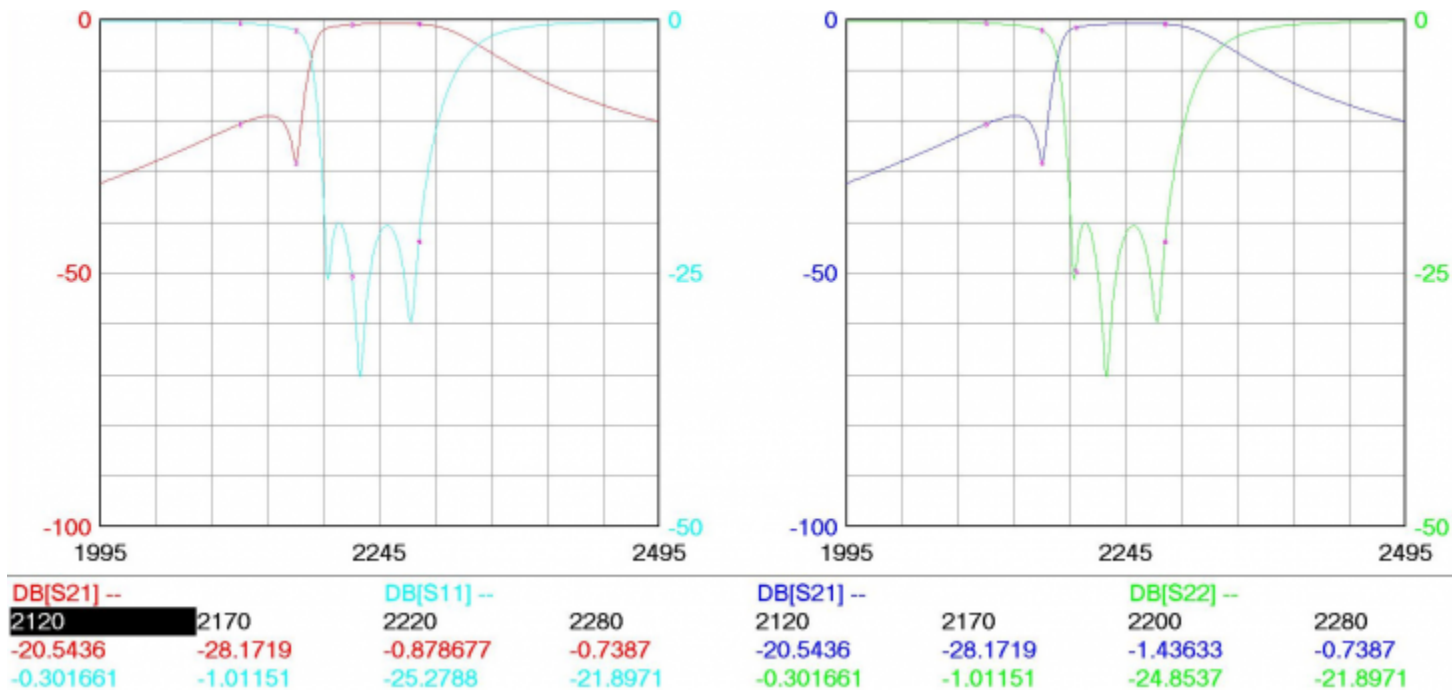

Filter Response Plot

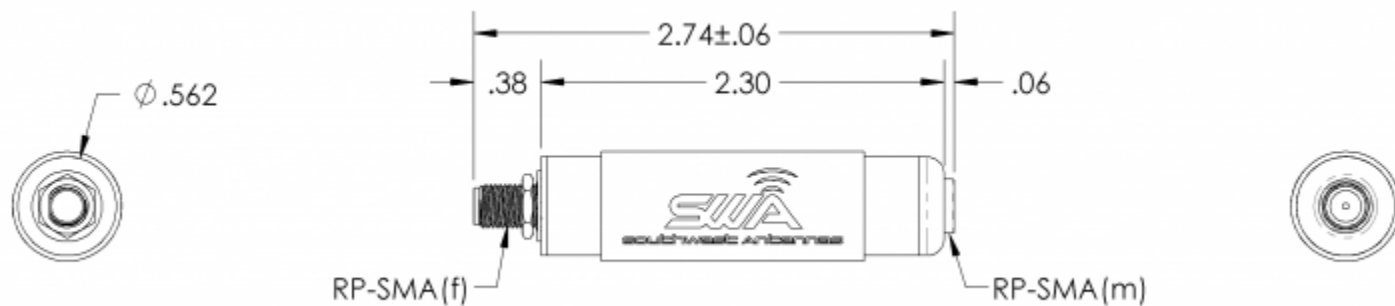

### Engineering Drawing

All dimensions are in inches