

Features:


- Broad Band Coverage
- 6.25 - 6.75 GHz
- RHCP
- 2.8 dBic Omni Radiation Pattern
- 20W Power Handling
- 3T "3 Turn"
- Pitch: 46%
- Rugged G10 Radome, Low Glare Black Polyurethane Finish
- Heavy Duty Spring Base



Antenna Specifications


Parameter	Value	Units	Tolerance
Antenna Pattern	Omni Antenna		
Frequency Band	C		
Impedance	50	Ohms	
Minimum Frequency	6.25 / 6,250	GHz / MHz	
Maximum Frequency	6.75 / 6,750	GHz / MHz	
Frequency Bandwidth	0.5 / 500	GHz / MHz	
Maximum VSWR	2:1	Ratio	
Maximum Gain	2.80	dBic	
Maximum RF Input Power	20	Watts	
Horizontal (AZ) Beamwidth	360	Degrees	
Vertical (EL) Beamwidth	163	Degrees	
Ground Plane Required	No		

Parameter	Value	Units	Tolerance
Radome Material	G10 Fiberglass		
Color	Black		
Spring or Gooseneck	Spring		
Spring Length	0.750 / 19.050	inches / mm	
Spring Diameter	0.750 / 19.050	inches / mm	
Mount Style	RF Connector		
Maximum Wind Velocity	100 / 161	mph / kph	
RF Connector Type	Type-N(m)		
Product Height	7.130 / 181.102	inches / mm	±0.13"
Product Diameter	0.812 / 20.625	inches / mm	+0.02" / -.000"
Product Weight	3.00 / 85.05	oz / grams	

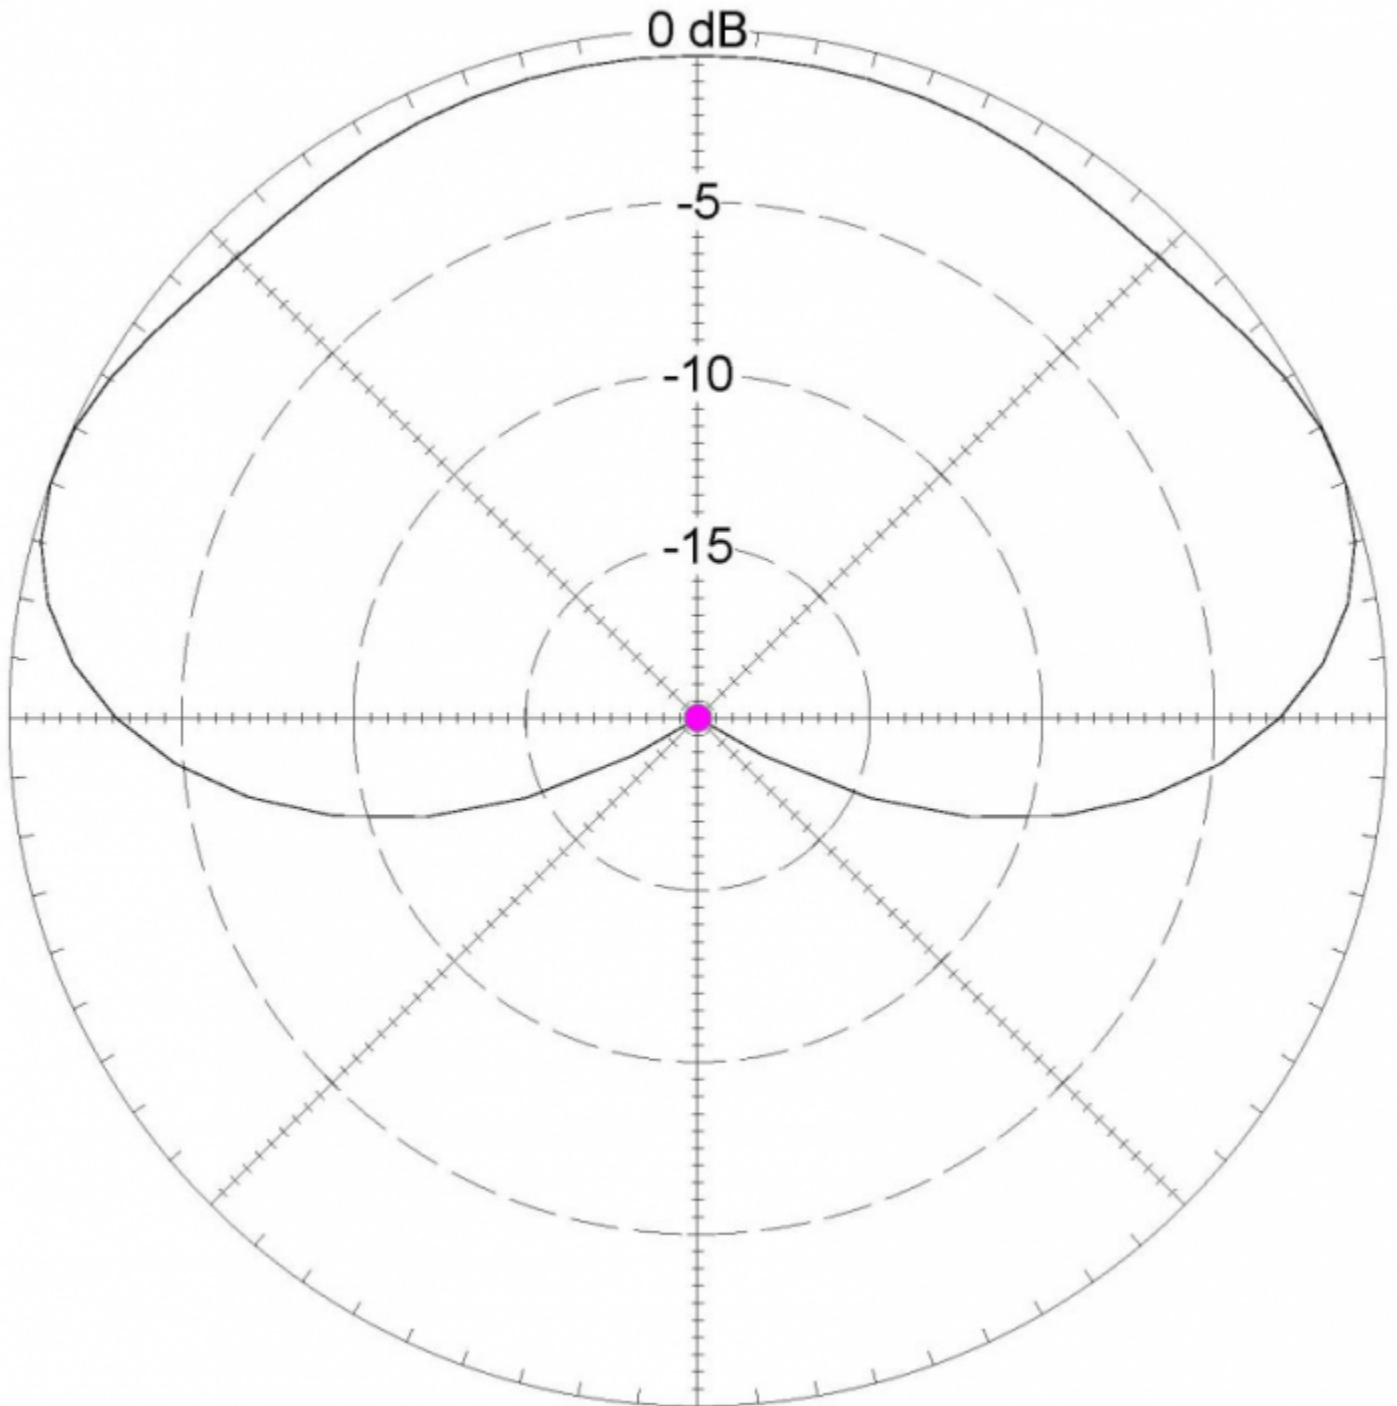

Elevation Pattern

referenced to 2.8 dBic

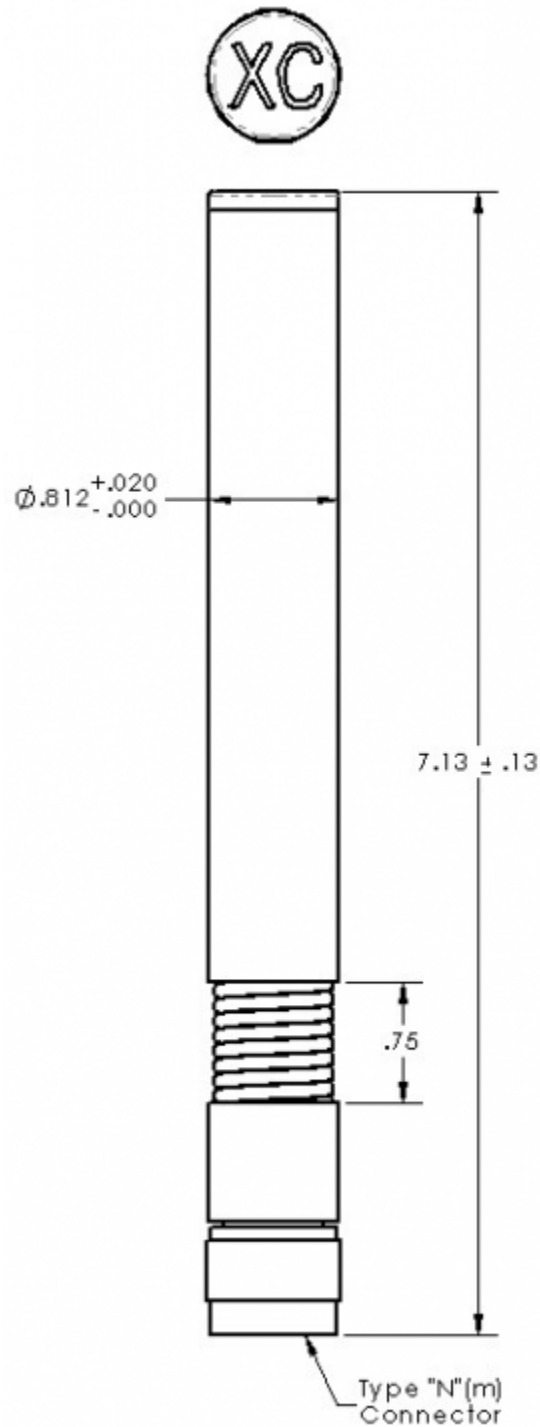

Engineering Drawing

Dimensions are in inches