

## Overview

Southwest Antennas' Ultra-Flex Omni Antenna is a rugged, small form factor dipole antenna that features an innovative environmentally-sealed spring base, giving the antenna flexibility to deflect/bend with impacts and return to its original vertical position. The integrated spring design minimizes stress placed on the antenna and radio connection, and can help prevent damage to both in the event of an impact.

The spring is fully sealed to prevent rain, dust, and other debris from impacting antenna performance, which is also fully submersible once securely mated to a radio. A G10 fiberglass radome holds up to abuse in the field, and a low-glare black finish helps the antenna blend into surroundings and not draw attention.

Part # 1001-069 features rugged black G10 fiberglass radome and a black chrome RP-SMA(m) RF connector, with an overall height of 6.04 inches.

## Features:


- Broad Band Coverage
- 2.1 - 2.5 GHz
- 50W Power Handling
- 2.15 dBi Omni Radiation Pattern
- Rugged Construction
- Low Glare Black Fiberglass Radome
- RP-SMA(m) Black Chrome RF Connector
- Ultra-Flexible Spring Base
- Sealed Spring / Waterproof Design
- Center Frequency Heat Shrink Label



## Antenna Specifications


Parameter	Value	Units	Tolerance
Antenna Pattern	Omni Antenna		
Frequency Band	S		
Impedance	50	Ohms	
Minimum Frequency	2.1 / 2,100	GHz / MHz	
Maximum Frequency	2.5 / 2,500	GHz / MHz	
Frequency Bandwidth	0.4 / 400	GHz / MHz	
Maximum VSWR	2:1	Ratio	
Maximum Gain	2.15	dBi	
Polarization	Vertical		
Horizontal (AZ) Beamwidth	360	Degrees	
Vertical (EL) Beamwidth	77	Degrees	
Ground Plane Required	No		
Radome Material	Fiberglass G10		
Color	Black		
Spring or Gooseneck	Spring		
Spring Length	1.00 / 25.40	inches / mm	
Spring Diameter	0.50 / 12.70	inches / mm	
Spring Bend	±90	Degrees	Maximum
Maximum Wind Velocity	100 / 161	mph / kph	
RF Connector Type	RP-SMA(m) Non-Rotating		
RF Connector Features	Black Chrome		

Parameter	Value	Units	Tolerance
<b>Operating Temperature Range</b>	-40 to +85	C	
<b>Product Height</b>	6.04 / 153.42	inches / mm	±0.13"
<b>Product Diameter</b>	0.56 / 14.27	inches / mm	+0.02" / -.000"
<b>Product Weight</b>	2.0 / 56.7	oz / grams	

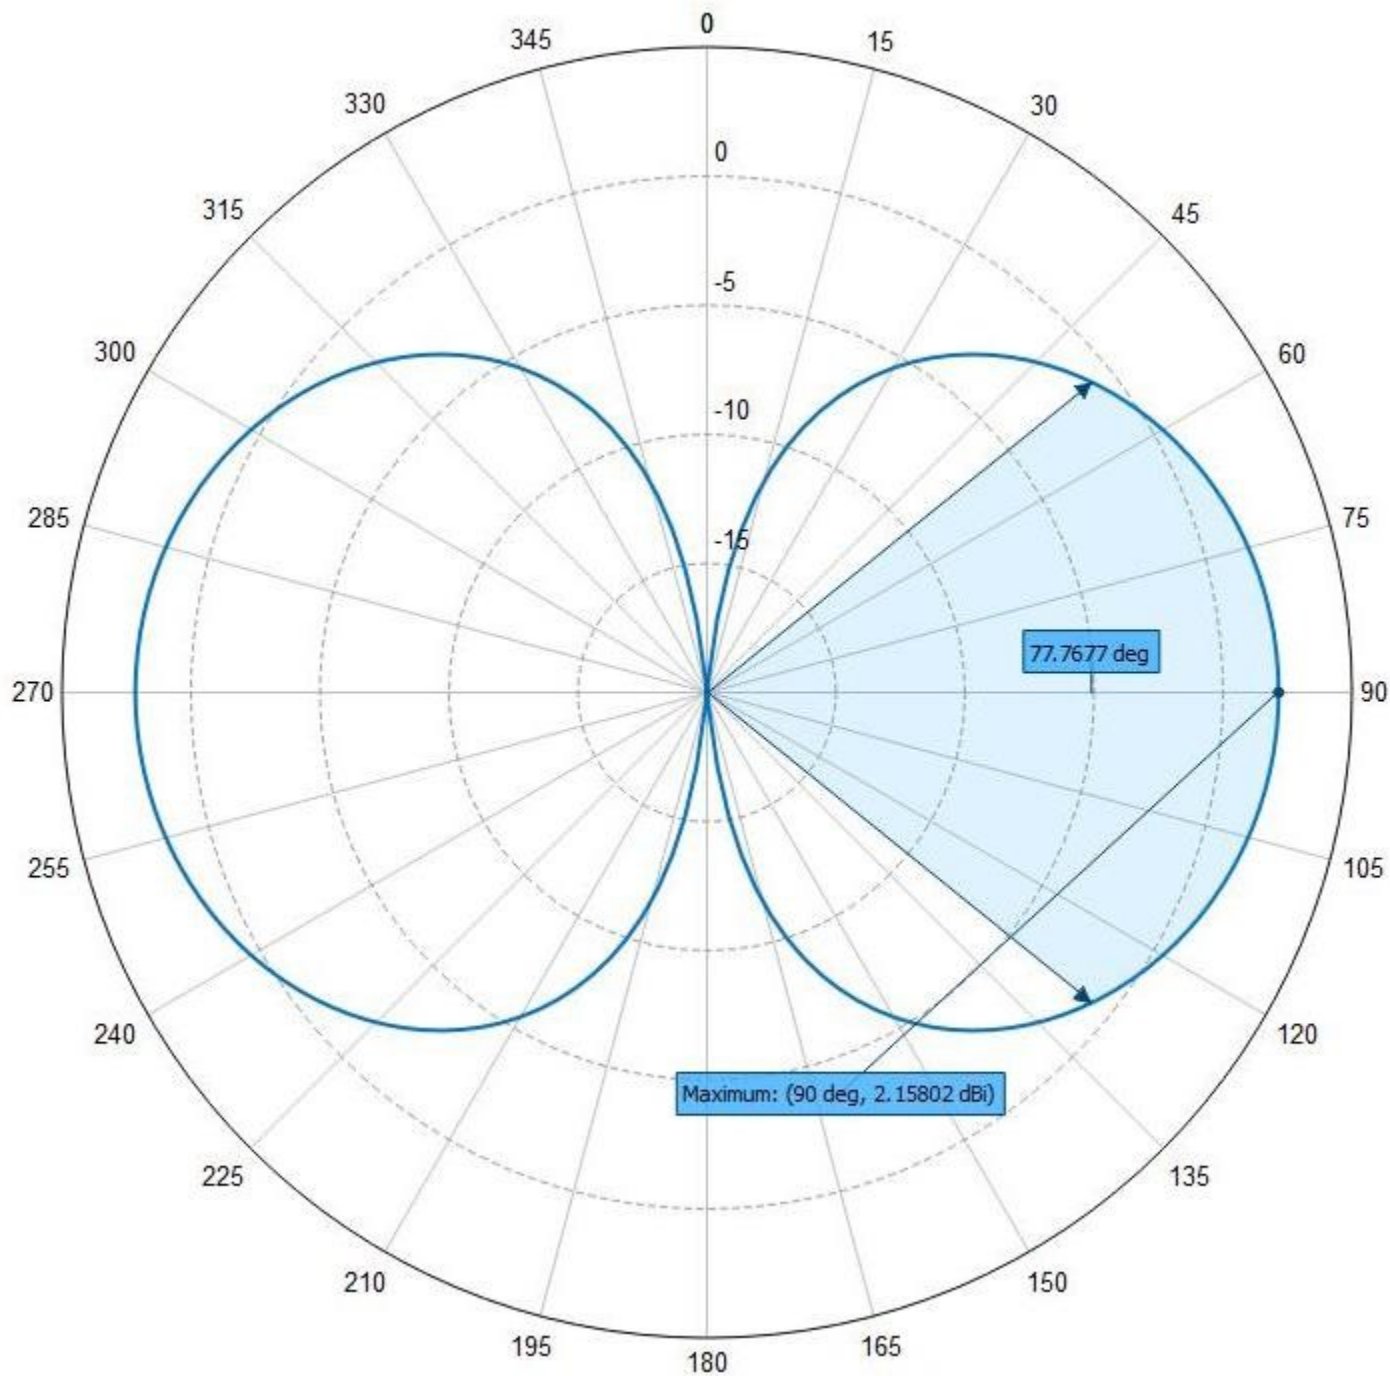

**Elevation Pattern**

Referenced to +5 dBi

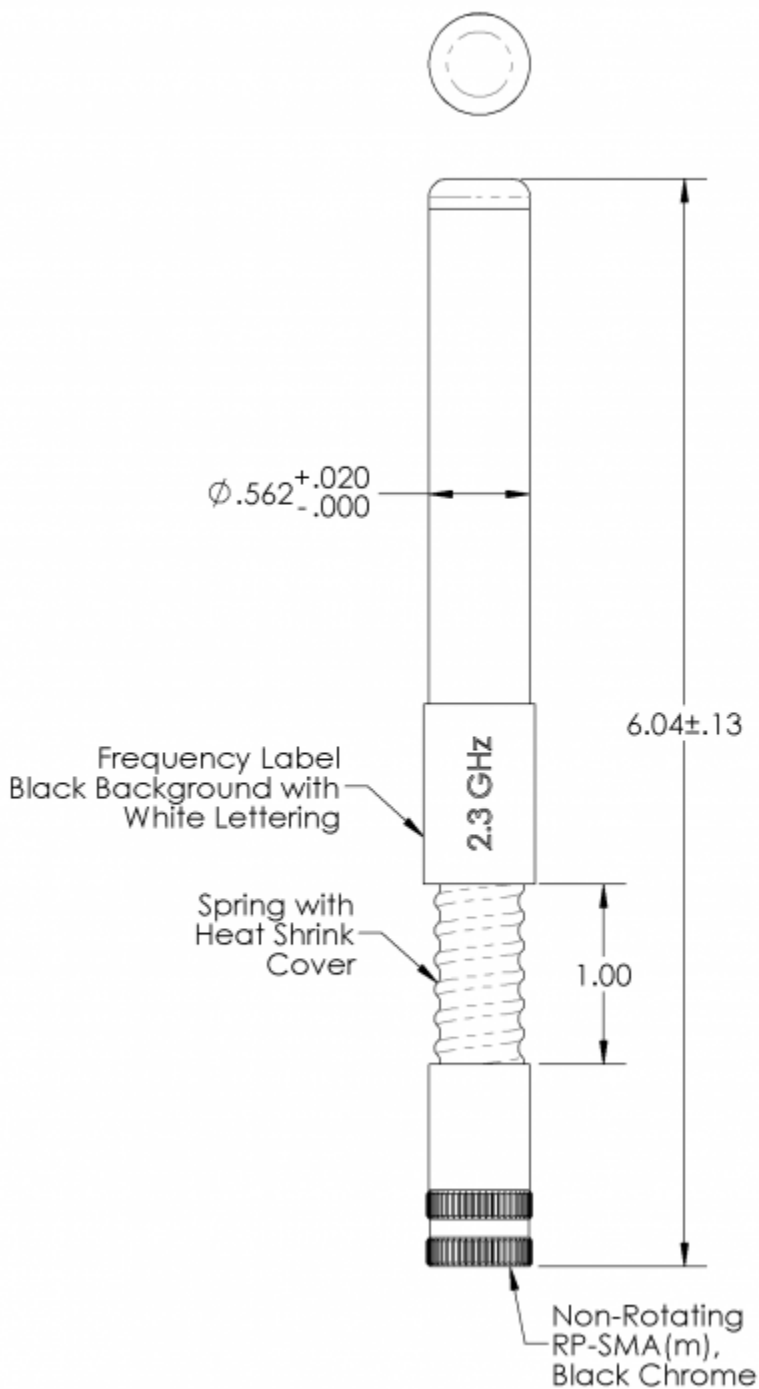

**Engineering Drawing**

All dimensions are in inches